


# **MOBILE ALUMINIUM TOWER**

#### SINGLE WIDTH MOBILE TOWER



DOUBLE WIDTH MOBILE TOWER

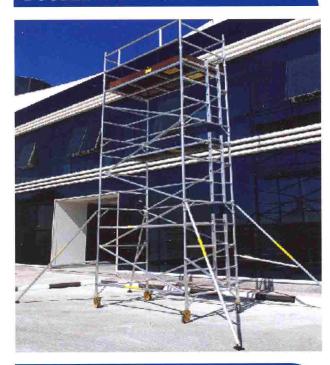

### **ACCESSORIES**



Horizontal (Blue)



Diagonal





200mm Heavy **Duty Caster** Wheel with Jack



4 Rung Span Frame



4 Rung



Fixed deck (Wooden)



Trapdoor (Wooden)



Toe Board (Wooden)

This tower systems are fast and easy to erect and ideal for maintenance work indoor and outdoor. If there is narrow space for placing a mobile tower, this mobile tower offers an excellent solution with its 90cm wide frames. The maximum working height for interior and exterior work is 10M. It is also equipped with construction manual and labels. The maximum load per platform is 225kgs and for the entire tower is 600kgs including tower self weight.

#### **SPECIFICATION**

Width available : 0.78M Mainframe height: 1.5M and 2M

Length available : 1.58M, 1.78M, 2.08M and 2.55M.

#### TECHNICAL FEATURE:

- Adjustable leg up to 30cm
- Working Platform 0.78M x 1.78M
- Capacity 200kg/sq.M.
- Rung Distance 50 cm
- · Ladder Rung Distance: 28 cm.
- Aluminium Alloy 6061 T6
- Frame Tube Thickness 2.5mm
- · Platform Anti-slip Plywood with Aluminium Frame
- · Number of rungs in a ladder: 7 step ladder in each 2M frame

It is the most popular mobile scaffolding tower, available in 1.39M wide frames. This system has numerous applications for both interior and exterior use. The maximum working height for interior work is 14M and exterior work is 10M. Equal length braces, stabilizers, platforms, wheel legs and toe board can be interchanged between single width mobile scaffolding tower. It is also equipped with construction manual and labels. The maximum load per platform is 250kgs and for the entire tower is 750kgs including tower self weight.

## **SPECIFICATION**

Width available: 1.20M, 1.39M, 1.60M and 2.00M.

Mainframe height: 1.5M, 2M.

Length available : 1.78M, 2.08M, 2.55M and 2.98M.

#### **TECHNICAL FEATURE:**

- · Adjustable leg up to 30cm
- · Working Platform (139 x 255) cm
- · Capacity 200kg / sq M
- Rung Distance 50 cm
- Ladder Rung Distance 28 cm
- Aluminium Alloy 6061 T6
- Frame Tube Thickness 2.5mm
- Platform Anti-slip Plywood with Aluminium Frame
- Number of rungs in a ladder 7 Step ladder in each 2m frame



(Yellow)



Stabilizer





Ladder Frame